

CAMERA INSPECTION MODULE FOR THE ESP300 ROLL REWIND PROCESSOR

FEATURES & BENEFITS

EASILY - MOUNTS TO ANY ESP300 ROLL REWIND PROCESSOR.

PERFECT- FOR "FOLLOW-UP" MAILING JOBS; DOUBLES OUTPUT OF THE PRINTER.


CONVERT - 1-UP FORMS TO 2-UP; SWITCH FROM SINGLE TO DOUBLE WEB.

LOW MAINTENANCE.

TOP MOUNTING - SAVES SPACE IN PRINT ROOM.

OPERATOR FRIENDLY.

INTERFACES - WITH ESP300 ELECTRICAL SOURCE.

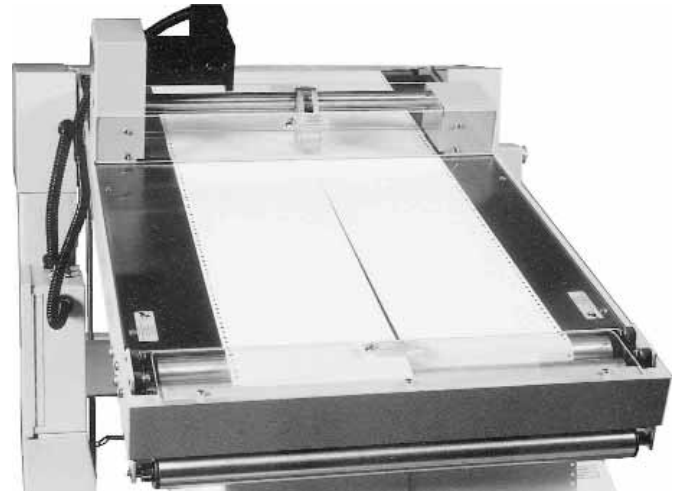

SPECIFICATIONS

MACHINE

MAX. SPEED	300 FPM
ELECTRICAL	1.5 KVA 120V 50/60 HZ*

ENVIRONMENTAL

TEMPERATURE	30° TO 110° F
HUMIDITY	20% TO 90%
NOISE	76 dBA

FORMS

ROLL DIAMETER	MAX. 52"
FORM WIDTH	MAX. 20"

OPTIONS

*INTERNATIONAL POWER OPTION



ESP, ENERGY SAVING PRODUCTS
713 GEORGE WASHINGTON TPKE
BURLINGTON, CT 06013-2037
860.675.6443

www.espcorp.com • sales@espcorp.com

NOTE: Specifications may change without notice. 06/03